



# AN UPTOWN COMBO AT A DOWNTOWN PRICE.

## *The Sonicator® Plus 930 Combo*

Introducing a hot new combo that performs muscle stimulation *and* therapeutic ultrasound. The exciting new Sonicator Plus 930 features a 1- and 3-MHz, 5 cm<sup>2</sup> applicator for therapeutic ultrasound, plus the three most popular stim waveforms—Interferential, Premodulated and Medium Frequency (Russian).


In one compact package, the Sonicator Plus 930 gives you:

- Independent control of up to three treatment protocols
- Two intensity controls and two intensity displays, enabling the operator to monitor all aspects of a treatment simultaneously
- An easy-to-use membrane panel designed for quick set-up and simple operation
- A convenient recessed cradle that holds the ultrasound applicator between treatments

**M**ETTLER **E**LECTRONICS®

©2001, Mettler Electronics Corp. All rights reserved.

# THE SONICATOR® PLUS 930 COMBO

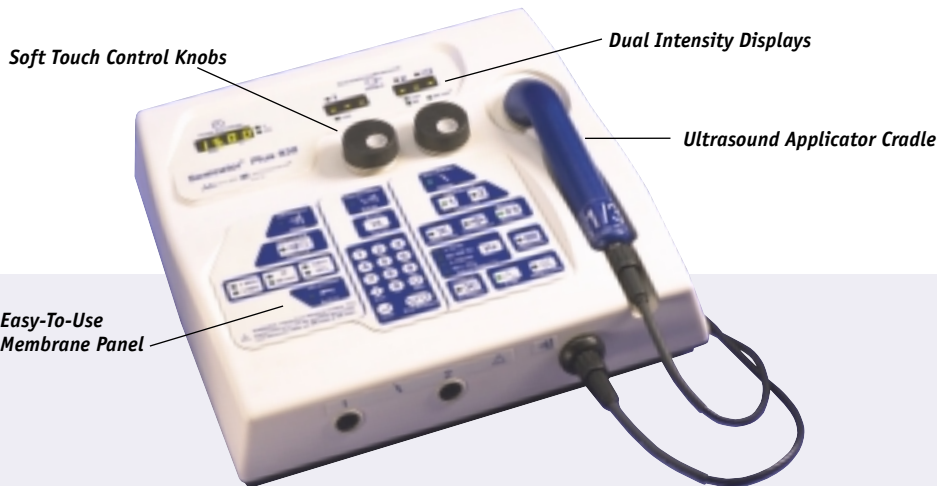

The model 93 or 94 cart offers a sturdy treatment platform for heavy clinical use.



The economical model 73 cart includes 3 shelves to accommodate Mettler units and accessories.

## THE RIGHT COMBINATION OF PERFORMANCE AND VALUE.

The value-priced Sonicator Plus 930 combines a wealth of important features for the busy practice. Therapeutic ultrasound is provided by a 1- and 3-MHz, 5 cm<sup>2</sup> applicator with unique direct crystal-to-patient contact. And muscle stimulation is delivered in a choice of three waveforms—Interferential, Premodulated, and Medium Frequency (Russian stimulation).

The Sonicator Plus 930 is also remarkably easy to set up and use. To start a treatment, just select treatment parameters with as few as three keystrokes. Then adjust the intensity with a twist of the dial.

Impressive performance capabilities, outstanding simplicity of design—that's the Sonicator Plus 930. Dollar for dollar, no one gives you more than Mettler.

### General Specifications:

<b>Input:</b>	90-240 VAC, 50-60 Hz
<b>ETL and C-ETL Listed:</b>	Model ME 930 (9801427)
<b>Weight:</b>	8.7 pounds
<b>Dimensions:</b>	6 in (H) x 12 in (W) x 12 in (D)
<b>Warranty:</b>	2 year limited

### Ultrasound Specifications:

<b>Effective Radiating Area:</b>	5 cm <sup>2</sup>
<b>Frequency:</b>	1.0 MHz 3.2 MHz
<b>Modes:</b>	Continuous Pulsed, 20%
<b>Maximum Output Power:</b>	11 W
<b>Maximum Intensity:</b>	2.2 W/cm <sup>2</sup>

### Stimulation Specifications:

<b>Waveforms:</b>	Interferential, Premodulated, Medium Frequency (Russian)
<b>Output:</b>	Interferential, 0-65 mA RMS, 1 kOhm load Premodulated, 0-50 mA RMS, 1 kOhm load Medium Frequency, 0-50 mA RMS, 1 kOhm load
<b>Frequency:</b>	Interferential, 4000 Hz, 0-250 Hz Premodulated, 4000 Hz, 1-250 Hz Medium Frequency, 2500 Hz, 50 Hz
<b>Output Options:</b>	Continuous, Vector Rotation, Surge, Reciprocation

METTLER ELECTRONICS®

